


GATE SCHEDULE

NOTE: Dimensions shown are actual
brickwork opening sizes.
All dimensions to be checked and verified on
site prior to manufacture.

The drawing shows a side elevation of a window unit. The unit is rectangular with a frame and internal horizontal slats. Above the unit, a dimension line indicates a total width of 900, with 32 units on each side and 836 units in the center. To the left of the unit, the text 'U/S LINTOL' is positioned above a dashed horizontal line. To the right of the unit, the text 'FFL' is positioned above a dashed horizontal line. On the right side of the unit, two vertical dimension lines are shown: the inner one indicates a height of 2068, and the outer one indicates a height of 2100. A small dimension of 32 is also shown at the top right corner of the unit's frame.

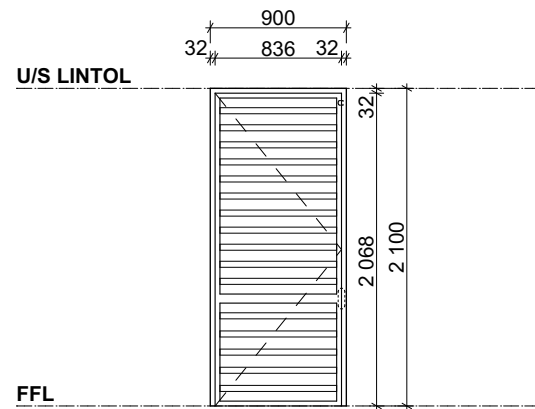

Quantity: 01 Position: As indicated on plan. <i>Contractor to check plans for LH/RH openings.</i>	G01	
---	------------	--

G01

DESCRIPTION
Shutterway Stylish Security gate, to fit door opening 900x2100mm, and fixed to inside of door threshold all as per manufacturers recommendation and specifications.

Shutterway Stylish Security gate, to fit door opening 900x2100mm, and fixed to inside of door threshold all as per manufacturers recommendation and specifications.

FRAME
31.7x31.7mm square hollow steel section, with 40mm flat bar louvres, all as per manufacturers specification,

31.7x31.7mm square hollow steel section, with 40mm flat bar louvres, all as per manufacturers specification,

FINISH
Steel to be powder-coated, colour: "matt charcoal" all as per manufacturers specifications.

Steel to be powder-coated, colour: "matt charcoal" all as per manufacturers specifications.


LOUVRES
40mm flat bar louvres welded at 48° at max 116mm spacing, factory fitted as per manufacturers specifications.

40mm flat bar louvres welded at 48° at max 116mm spacing, factory fitted as per manufacturers specifications.

IRONMONGERY
Factory fitted double throw dead-lock on cover plate, as per manufacturers specifications.

Factory fitted double throw dead-lock on cover plate, as per manufacturers specifications.

GATE SPECIFICATION

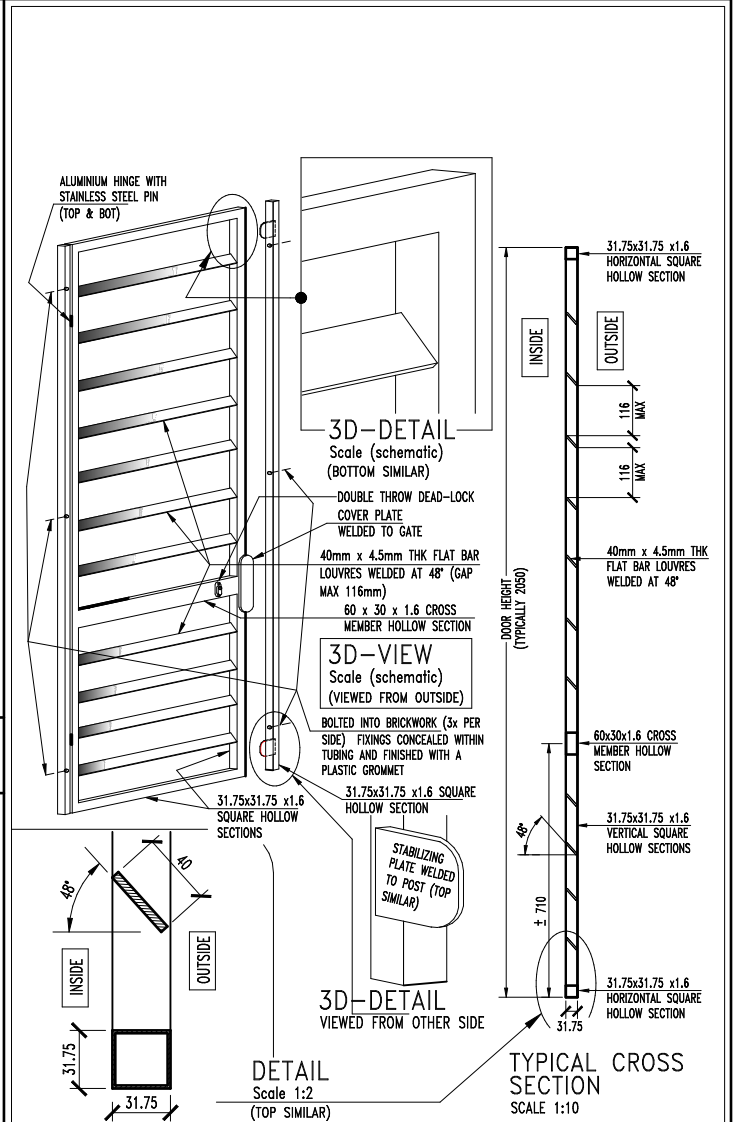

SHUTTERWAY
STYLISH SECURITY

GATE

Tel : 021 510 1540
email: info@shutterway.co.za
web : www.shutterway.co.za

OTHER NOTES

APPROVAL

DEPARTMENT	NAME	DATE	SIGNATURE
SDL			
DBI			
DBSA			



The contractor is to keep a full set of drawings on site, contractor is responsible for the correct setting out of the building on site with reference to boundaries and building lines, contractor to verify all levels and dimensions on site and check same against architects and engineers drawings before commencing work. Figured dimensions to be used in preference to scaled dimensions, large scale details to be used were available, errors, discrepancies or omissions are to be reported to the architect immediately for clarification before work is undertaken.

These drawings are to be read in conjunction with structural engineers, civil engineers, mechanical engineer's or plumbing consultant's drawings were specified.

All work and material used to comply with SABS standards and NATIONAL BUILDING REGULATIONS ACT 103 of 1977 and amendments thereto as well as the by-laws of the relevant local authority.

All new construction HEALTH AND SAFETY Regulations to be strictly complied with.

PROJECT NAME	ISSUED FOR	PROJECT INFORMATION
--------------	------------	---------------------

FREESTATE MEGA SCHOOLS: GATE SCHEDULE

ISSUED FOR	PROJECT INFORMATION
------------	---------------------

FOR TENDER

DRAWING NAME	
--------------	--

GATE SCHEDULE	
---------------	--

PROJECT INFORMATION

PROJECT NO.	175
-------------	-----

DRAWING NO.	15 CL-2+HOD+M.ABL-1.GS.01
--------------------	---------------------------

DATE:	2022/10/15
-------	------------

DRAWN BY:	LGM
------------------	-----

CHECKED BY:	FM
--------------------	----