

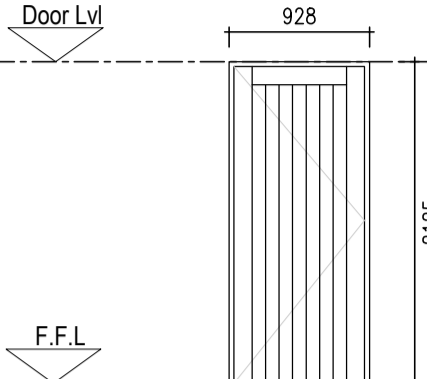
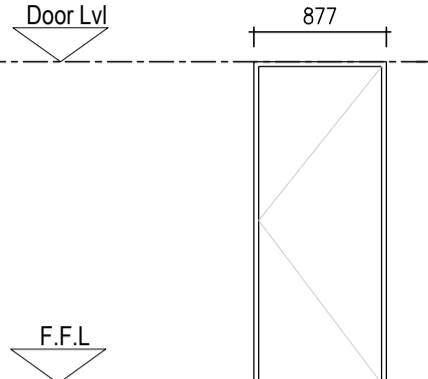
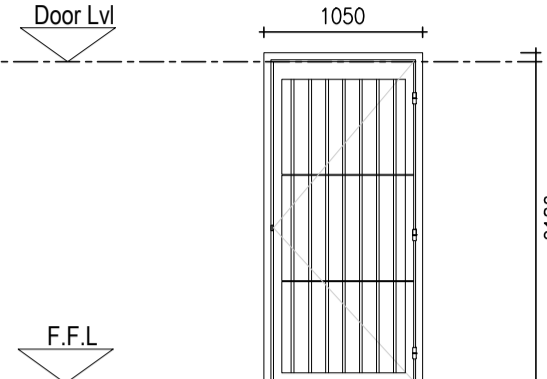
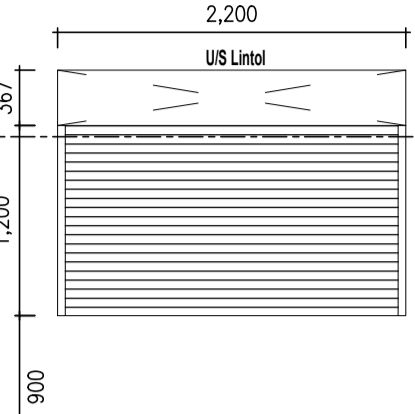


Window No.:	W13	Window No.:	W14	Door No.:	01	Door No.:	02	Gate no.:	01	Roller Door no.:	01
											
				NOTE: ROLLER COURSE (FULL BRICK) ON ALL DOOR OPENING (TRESH-HOLD/ STEP UP)							
FRAME	Durwin Standard steel 21, internally glazed industrial hot dip galvanised residential profile purpose made windows.	FRAME	Durwin Standard steel 21, internally glazed industrial hot dip galvanised residential profile purpose made windows.	FRAME FINISH	Standard Galvanized Steel door frame, suitable for double skin wall.	FRAME FINISH	Standard Galvanized Steel door frame, suitable for single skin wall.	FRAME FINISH	Galvanised, Not painted	FRAME FINISH	Gloss enamel paint.
GLASS	4mm "Safety Glass" glass puttied in with steel window putty.	GLASS	4mm "Safety Glass" glass puttied in with steel window putty.	DOOR	2032 x 813 x 40mm Standard approved "meranti" ledged and braced batten door with: 40x10mm styles and top rail, 20x150mm middle ledge, 20x225mm bottom ledge and 20x110mm braces.	DOOR	2032 x 813 x 40mm Solid flush panel door with approved hardwood veneer both sides and two hardwood edge strips.	DOOR	2125h Purpose made gms single gate, for a 900 mm structural opening, complete with hinges & locking mechanism, all to manufacturers specifications.	DOOR	Approved hot dipped galvanised steel 46mm interlocking 11,5 kg/meter square slatted roller shutter door with push-up action supplied complete and fixed strictly in accordance with the manufacturer's recommendations.
FITTINGS	Approved standard chrome plated fittings to suite opening styles.	FITTINGS	Approved standard chrome plated fittings to suite opening styles.	DOOR FINISH	2 Coats clear mat varnish.	DOOR FINISH	2 Coats clear mat varnish.	DOOR FINISH	Galvanised, Not painted	DOOR FINISH	Internally lockable bolt and lock with 2 keys as supplied with door.
BURGLAR BARS	10mm Square burglar bars at 150mm centres to be fully burglar barred.	BURGLAR BARS	10mm Square burglar bars at 150mm centres to be fully burglar barred.	FURNITURE	Classrooms : 4 Lever Union Lockset, x1 Rubber door stopper. Provide leaf spring door holder. Hinges as per manufacture.	FURNITURE	Store Rooms: : 3 Lever Union Lockset, x1 Rubber door stopper. Provide leaf spring door holder. Hinges as per manufacture.	FURNITURE	2 lever deadlock, 1x 38mm red rubber door stop on wall,	FURNITURE	Internally lockable bolt and lock with 2 keys as supplied with door.
FINISH	Galvanised, Not painted	FINISH	Galvanised, Not painted	QUANTITY	X3	QUANTITY	X2	QUANTITY	X4	QUANTITY	X1
QUANTITY	x2	QUANTITY	x2								
LOCATION	See Layout	LOCATION	See Layout								

CEILING TYPE AA

6.4mm Rhino Board strip ceiling Ex. 1200 x 4800mm boards cut to suit ceiling layout fixed printed side up at right angles to 50 x 38mm s.w. bracing at 400 centres in one direction, using 32mm galvanised semi-clout nails at 150mm centres. Joints between boards to be held in "Rhino"- M strip. All nail heads to be sunk and depressions filled with approved stopping sanded smooth.

CORNICE: 75 mm Nulec coved cornice nailed to edge branders spaced +/- 38mm away from plastered wall and pinned and fixed to wall and ceilings with A.B.E.

All to be fixed in accordance with manufacturers' instructions and specifications.

Rafter Note:-  
All internal walls to be built up to a minimum of 2 brick coarse's above ceiling height. NB. At rafters tie beams, walls are to be kept clear of rafters so that no wall or wall finish will touch any rafter member.

SECURITY WALL  
220mm Thick brick wall built up to underside of roof sheets. Provide 4 x terra cotta air bricks per wall. Roof timber may pass through security wall.

FIRE WALL  
As for security wall above but timber may not pass through wall and no air bricks are to be provided. All as per OOG 001E and national building regulations.

REVISIONS

	DATE	DESCRIPTION
0A	14 AUG. 22	ISSUED FOR TENDER

CLIENT:



**education**  
Department:  
Education  
**PROVINCE OF KWAZULU-NATAL**

Head Office, 247 Burger Street, Pietermaritzburg, 3200  
Telephone Number: (033) 392 1203  
Fax number: (033) 392 1203

IMPLEMENTING AGENT:



Headway Hill, 1258 Lever Road, Midrand, South Africa  
Telephone Number: +27 11 313 3911  
Fax number: +27 11 313 3500 or +27 11 313 3297  
Web: webmaster@dbssa.org

PRINCIPAL AGENT:



Regus Westway, -3 Floor,  
18 The Boulevard, Westway Office Park  
Tel: +27 31 003 3136  
Fax: +27 31 003 3101  
Email - nothile@bhadama.co.za/ sbu@bhadama.co.za

PROJECT NAME & CLIENT INFORMATION  
KZN-DOE/DBSA - STORM  
DAMAGED PROGRAMME.

SECTION / BLOCK  
BHILIYA SS - BLOCK C: SNP  
KITCHEN

TITLE  
GENERAL LAYOUTS &  
DETAILS

DRAWING DESCRIPTION  
WINDOW & DOORS SCHEDULE  
and GENERAL SPECIFICATIONS

SCALE		AS SHOWN			
DESIGNED NM	DATE AUG. 2022	PrEng No.		SIGN.:	
DRAWN NM	DATE AUG. 2022	SACAP NO.		SIGN.:	
APPROVED NM	DATE AUG. 2022	DRAWN:		SIGN.:	
		NM			
DRAWING NUMBER:					
KZN.DoE/ DBSA-BPP-EPS-C-S&F-011-0A					
				REVISION	
				0A	

PREPARED BY:



**PROJECTS**  
ARCHITECTS | PROJECT MANAGERS

Unit no. 27  
Pallana Velly, 01 Robertson Road, New Germany, 3610  
Cell: 082 1626 167 - Fax: 086 762 562  
Email: nkululeko@kznzprojects.co.za

FOR TENDER "ONLY"