




<div>CLIENT</div> <div><div>basic education Department: Basic Education REPUBLIC OF SOUTH AFRICA</div></div> <div>CONTACT INFORMATION: PERSON: NUMBER: EMAIL:</div>		<div>BUILDING CODE: DD2</div> <div>BUILDING TYPE: LIBRARY CENTRE</div>		SDP PLAN			
<div>CUSTODIAN</div> <div>INSERT CUSTODIAN LOGO HERE</div> <div>CONTACT INFORMATION: PERSON: NUMBER: EMAIL:</div>							
<div>IMPLEMENTING AGENT</div> <div>INSERT IMPLEMENTING AGENT LOGO HERE</div> <div>CONTACT INFORMATION: PERSON: NUMBER: EMAIL:</div>							
<div>PRINCIPAL AGENT</div> <div>INSERT PRINCIPAL AGENT LOGO HERE</div> <div>CONTACT INFORMATION: PERSON: NUMBER: EMAIL:</div>							
<div>ARCHITECT</div> <div>INSERT ARCHITECT LOGO HERE</div> <div>CONTACT INFORMATION: PERSON: NUMBER: EMAIL:</div>		<div>IMPLEMENTATION PROGRAMME BUILDING DOCUMENTATION PROGRAMME DESCRIPTION</div>		SCHOOL INFORMATION		SCHOOL NAME	
<div>MECHANICAL & ELECTRICAL</div> <div>INSERT MECHANICAL & ELECTRICAL LOGO HERE</div> <div>CONTACT INFORMATION: PERSON: NUMBER: EMAIL:</div>				LOCATION:	LOCATION		
<div>CIVIL & STRUCTURAL</div> <div>INSERT CIVIL & STRUCTURAL LOGO HERE</div> <div>CONTACT INFORMATION: PERSON: NUMBER: EMAIL:</div>				GPS:	GPS CO-ORDINATES		
<div>OTHER</div> <div>INSERT OTHER LOGO HERE</div> <div>CONTACT INFORMATION: PERSON: NUMBER: EMAIL:</div>				EMIS:	EMIS NUMBER		
				PROGRAM:	IMPLEMENTATION PROGRAMME		
				PROJ No.:	0000		

COMPLEMENT

THIS DRAWING IS SUBJECT TO COPYRIGHT AND MAY NOT BE REPRODUCED, IN WHOLE OR PART, OR IN ANY MANNER WHATSOEVER WITHOUT WRITTEN PERMISSION FROM THE ARCHITECT.

ALL WORK TO BE CARRIED OUT STRICTLY IN ACCORDANCE WITH MUNICIPAL AND/OR LOCAL AUTHORITY REGULATIONS.


DO NOT SCALE THIS DRAWING. FIGURED DIMENSIONS TO BE TAKEN IN PREFERENCE TO SCALING DRAWING.

ALL RELEVANT DETAILS, LEVELS, AND DIMENSIONS TO BE CHECKED ON SITE PRIOR TO COMMENCEMENT OF WORK.

ANY DISCREPANCIES TO BE BROUGHT TO THE ATTENTION OF THE ARCHITECT.

DIMENSIONS ARE INDICATED IN MILLIMETERS.

CLIENT



basic education
Department:
Basic Education
REPUBLIC OF SOUTH AFRICA

REV	DATE	DESCRIPTION


PRINCIPAL AGENT

PRINCIPAL AGENT LOGO HERE

DISCIPLINE


ARCHITECT LOGO HERE

PROJECT DESCRIPTION	TITLE	
DOCUMENT STATUS	DOCUMENT STATUS	0000_AR_DD2_200
DRAWING NUMBER	DRAWING NUMBER	0000
DRAWING NUMBER	CHECK	CHECK
DATE	DATE	DD-MM-YYYY
SCALE	SCALE	SCALE

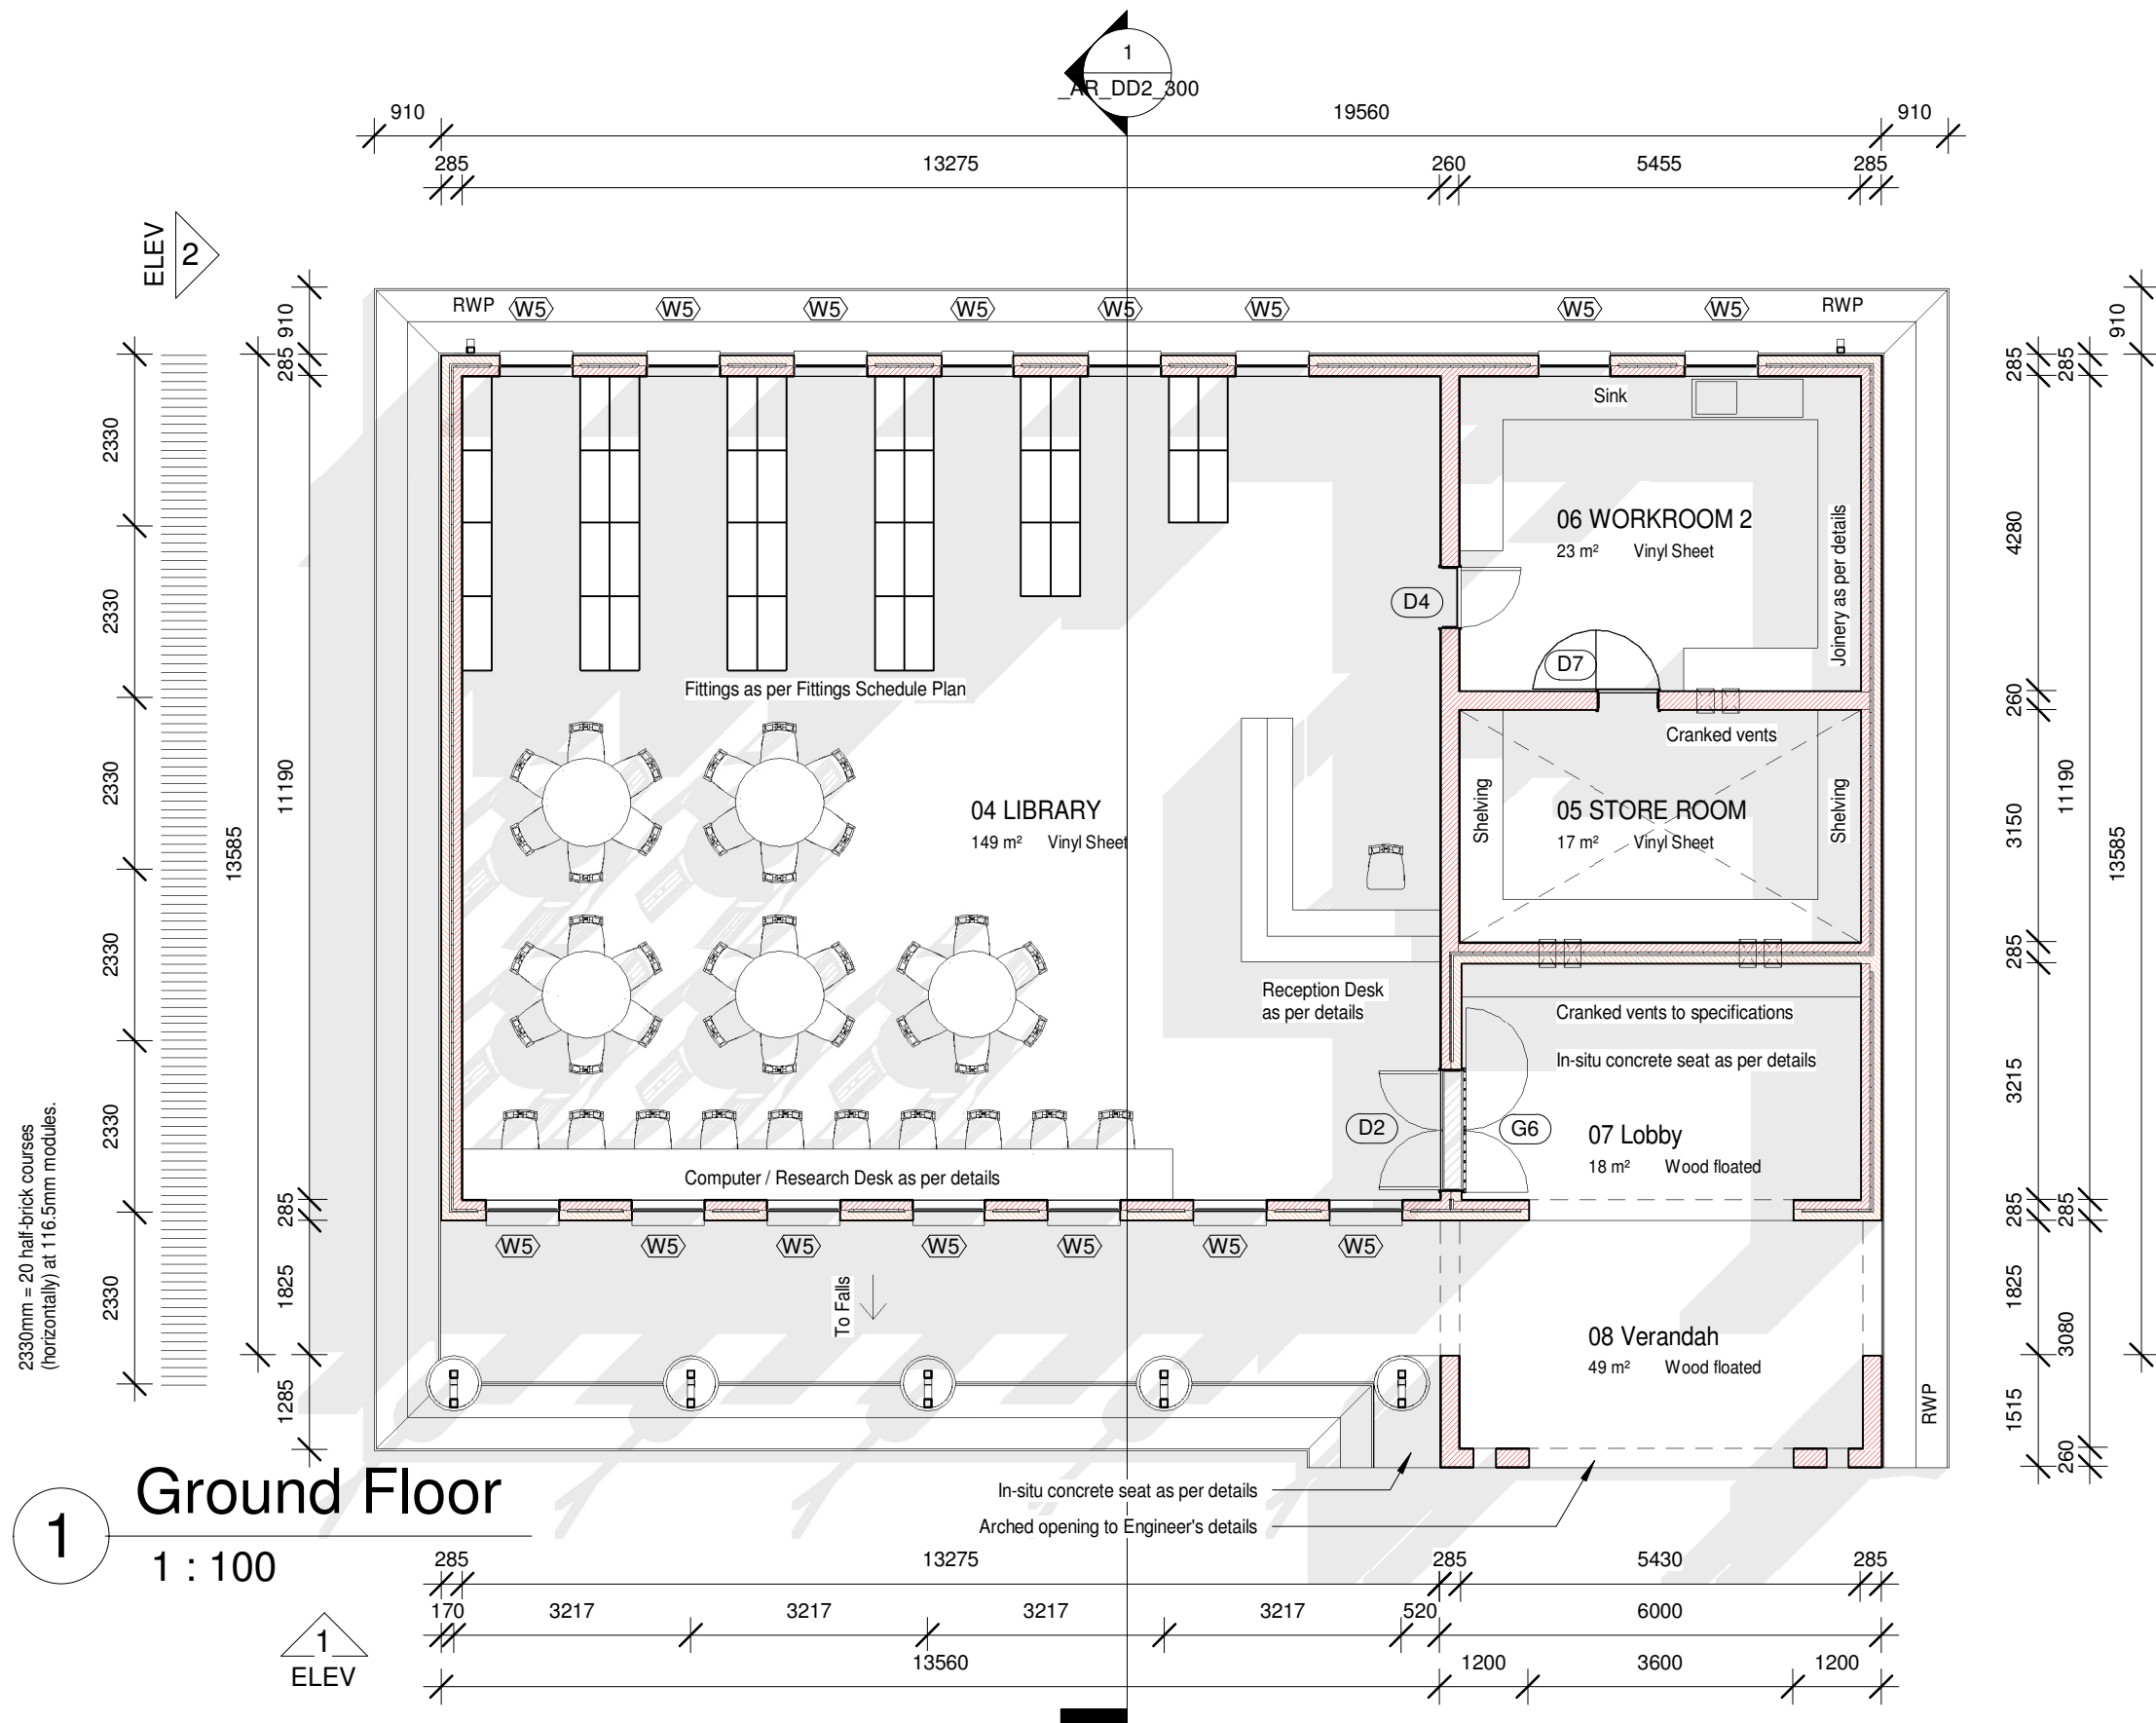

DOOR SCHEDULE	
Door Type	Total
D2	1
D4	1
D7	1
G6	1

WINDOW SCHEDULE	
Window Type	Total
W5	15

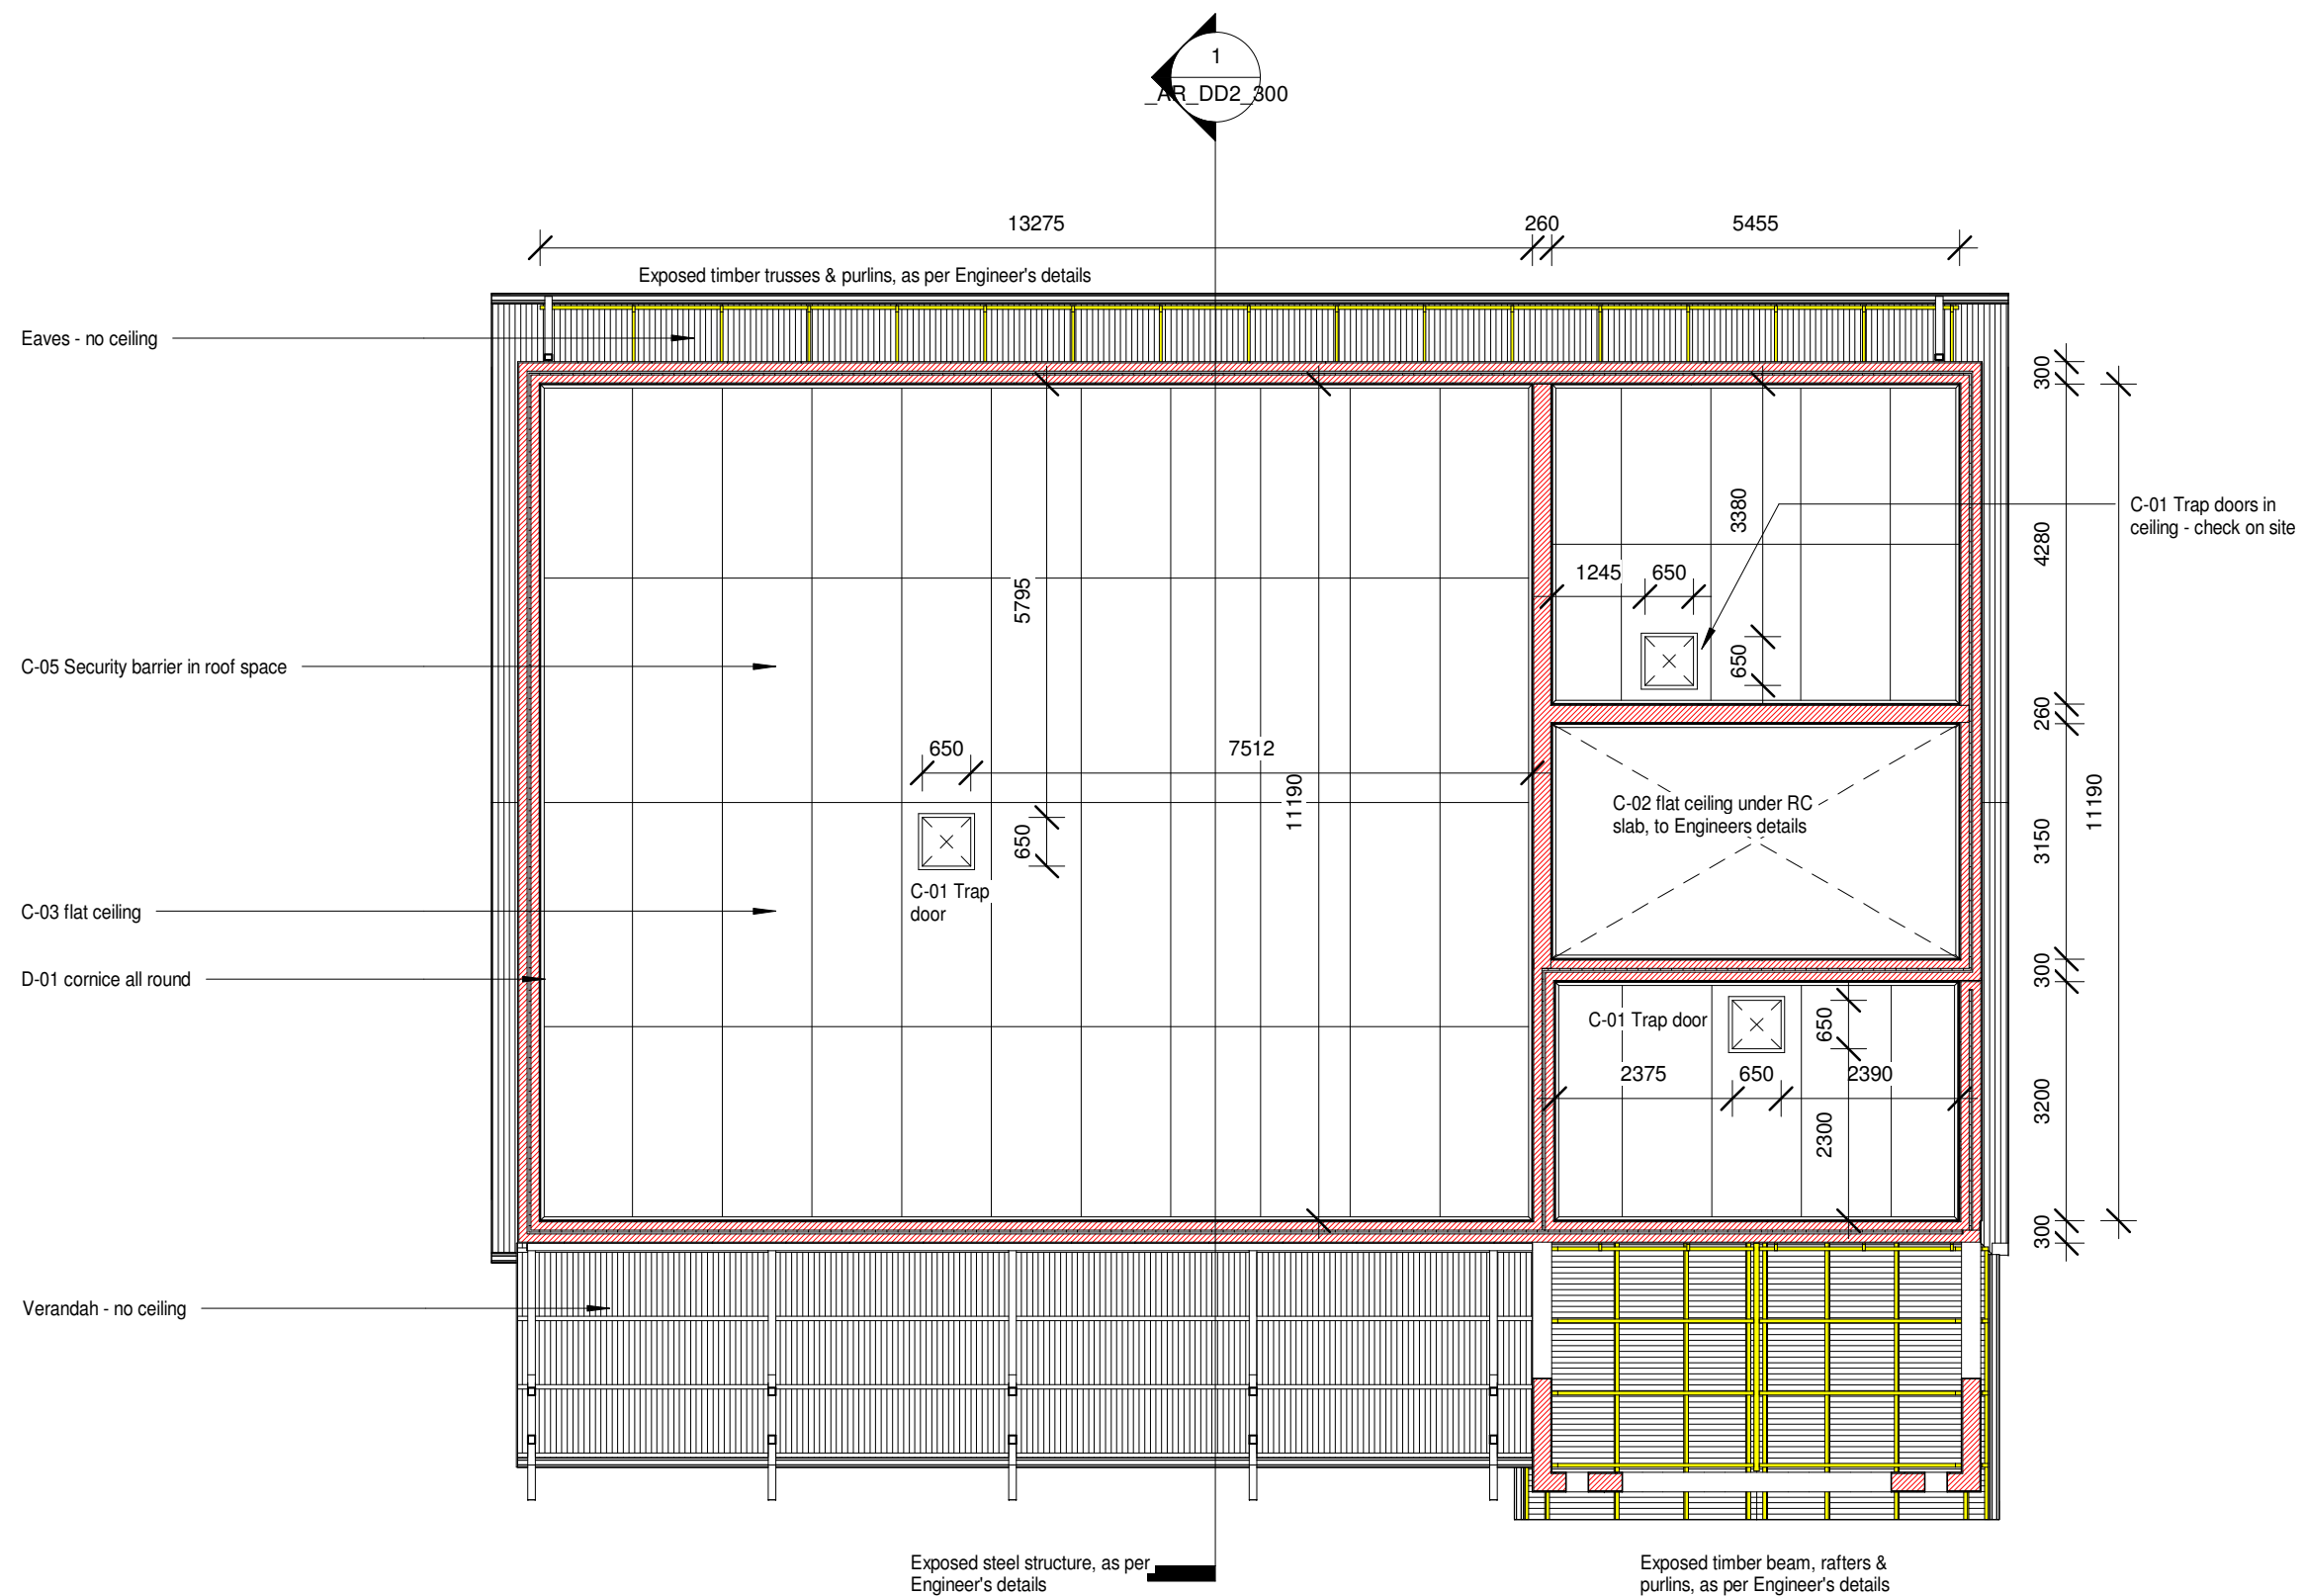

Ceiling Plan

(1

1 : 100

- THIS DRAWING IS SUBJECT TO COPYRIGHT AND MAY NOT BE REPRODUCED, IN WHOLE OR PART, OR IN ANY MANNER WHATSOEVER WITHOUT WRITTEN PERMISSION FROM THE ARCHITECT.
- ALL WORK TO BE CARRIED OUT STRICTLY IN ACCORDANCE WITH MUNICIPAL AND/OR LOCAL AUTHORITY REGULATIONS
- DO NOT SCALE THIS DRAWING. FIGURED DIMENSIONS TO BE TAKEN IN
- PREFERENCE TO SCALING DRAWING.
- ALL RELEVANT DETAILS, LEVELS, AND DIMENSIONS TO BE CHECKED
- ON SITE PRIOR TO COMMENCEMENT OF WORK
- ANY DISCREPANCIES TO BE BROUGHT TO THE ATTENTION OF THE ARCHITECT
- DIMENSIONS ARE INDICATED IN MILLIMETERS.

[illegible]

**PRINCIPAL AGENT
LOGO HERE**

ARCHITECT LOGO HERE

IMPLEMENTATION PROGRAMME

☐ CEILING PLAN


000 AR DD2 202

SON

LOOSE FURNITURE SCHEDULE -
REFER TO SCHEDULE ATTACHED

No.	ITEM - LIBRARY
40	FC1 - STACKABLE CHAIRS
1	FC11 - ADMIN. TYPIST CHAIR
38	FE6 - LIBRARY BOOK SHELVES
5	ROUND REFERENCE TABLES
10	PC (LAPTOPS) BY OTHER

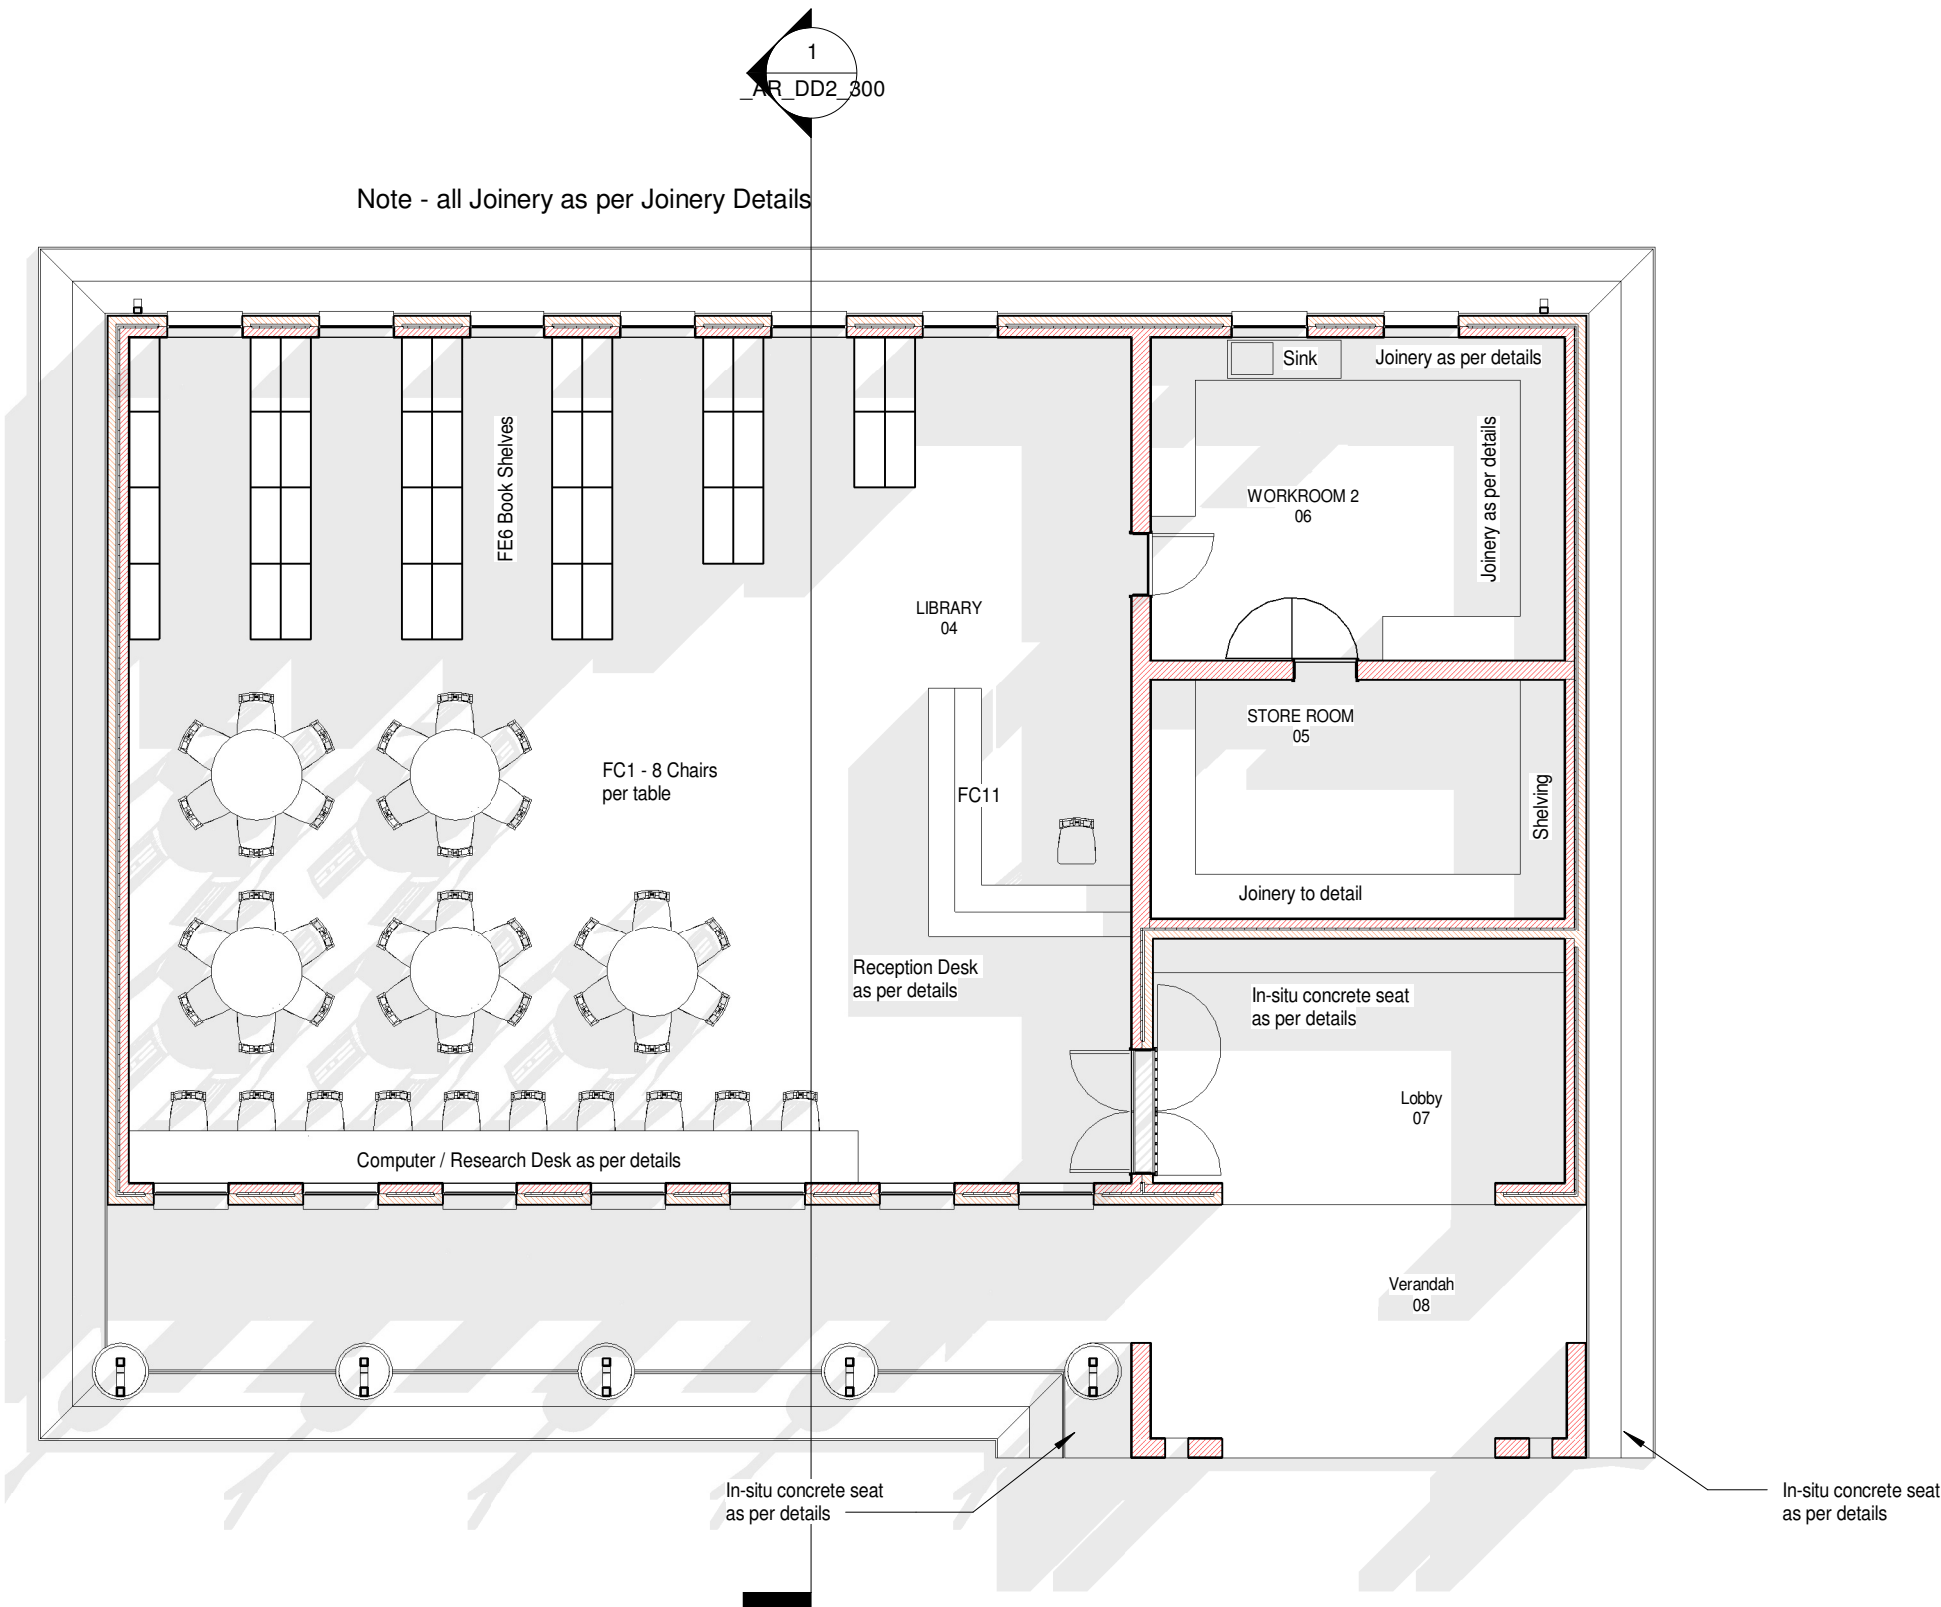Note - all Joinery as per Joinery Details



Furniture Plan

1 : 100

1

THIS DRAWING IS SUBJECT TO COPYRIGHT AND MAY NOT BE REPRODUCED, IN WHOLE OR PART, OR IN ANY MANNER WHATSOEVER WITHOUT WRITTEN PERMISSION FROM THE ARCHITECT.
ALL WORK TO BE CARRIED OUT STRICTLY IN ACCORDANCE WITH MUNICIPAL AND/OR LOCAL AUTHORITY REGULATIONS.
DO NOT SCALE THIS DRAWING. FIGURED DIMENSIONS TO BE TAKEN IN.
PREFERENCE TO SCALING DRAWING.
ALL RELEVANT DETAILS, LEVELS, AND DIMENSIONS TO BE CHECKED ON SITE PRIOR TO COMMENCEMENT OF WORK.
ANY DISCREPANCIES TO BE BROUGHT TO THE ATTENTION OF THE ARCHITECT.
DIMENSIONS ARE INDICATED IN MILLIMETERS.



REV	DATE	DESCRIPTION

PRINCIPAL AGENT
LOGO HERE

ARCHITECT LOGO HERE

IMPLEMENTATION
PROGRAMME

DOCUMENT STATUS

0000

FURNITURE LAYOUT PLAN

0000_AR_DD2_204

XX

XX

DD-MM-YYYY

As indicated



COPYRIGHT NOTE

◦ THIS DRAWING IS SUBJECT TO COPYRIGHT AND MAY NOT BE REPRODUCED, IN WHOLE OR PART, OR IN ANY MANNER WHATSOEVER WITHOUT WRITTEN PERMISSION FROM THE ARCHITECT.
◦ ALL WORK TO BE CARRIED OUT STRICTLY IN ACCORDANCE WITH MUNICIPAL AND/OR LOCAL AUTHORITY REGULATIONS.
◦ DO NOT SCALE THIS DRAWING. FIGURED DIMENSIONS TO BE TAKEN IN.
◦ PREFERENCE TO SCALING DRAWING.
◦ ALL RELEVANT DETAILS, LEVELS, AND DIMENSIONS TO BE CHECKED ON SITE PRIOR TO COMMENCEMENT OF WORK.
◦ ANY DISCREPANCIES TO BE BROUGHT TO THE ATTENTION OF THE ARCHITECT.
DIMENSIONS ARE INDICATED IN MILLIMETERS.

CLIENT



basic education
Department:
Basic Education
REPUBLIC OF SOUTH AFRICA

REV	DATE	DESCRIPTION


PRINCIPAL AGENT

PRINCIPAL AGENT
LOGO HERE

DISCIPLINE

ARCHITECT LOGO HERE

PROJECT DESCRIPTION	IMPLEMENTATION PROGRAMME	DRAWING DESCRIPTION	3D PERSPECTIVE
DOCUMENT STATUS	DOCUMENT STATUS	DRAWING NUMBER	0000_AR_DD2_205
PROJECT NUMBER	0000	DRAWING NUMBER	0000_AR_DD2_205
CHECK	XX	CHECK	XX
DATE	DD-MM-YYYY	DATE	DD-MM-YYYY
SCALE	SCALE	SCALE	SCALE

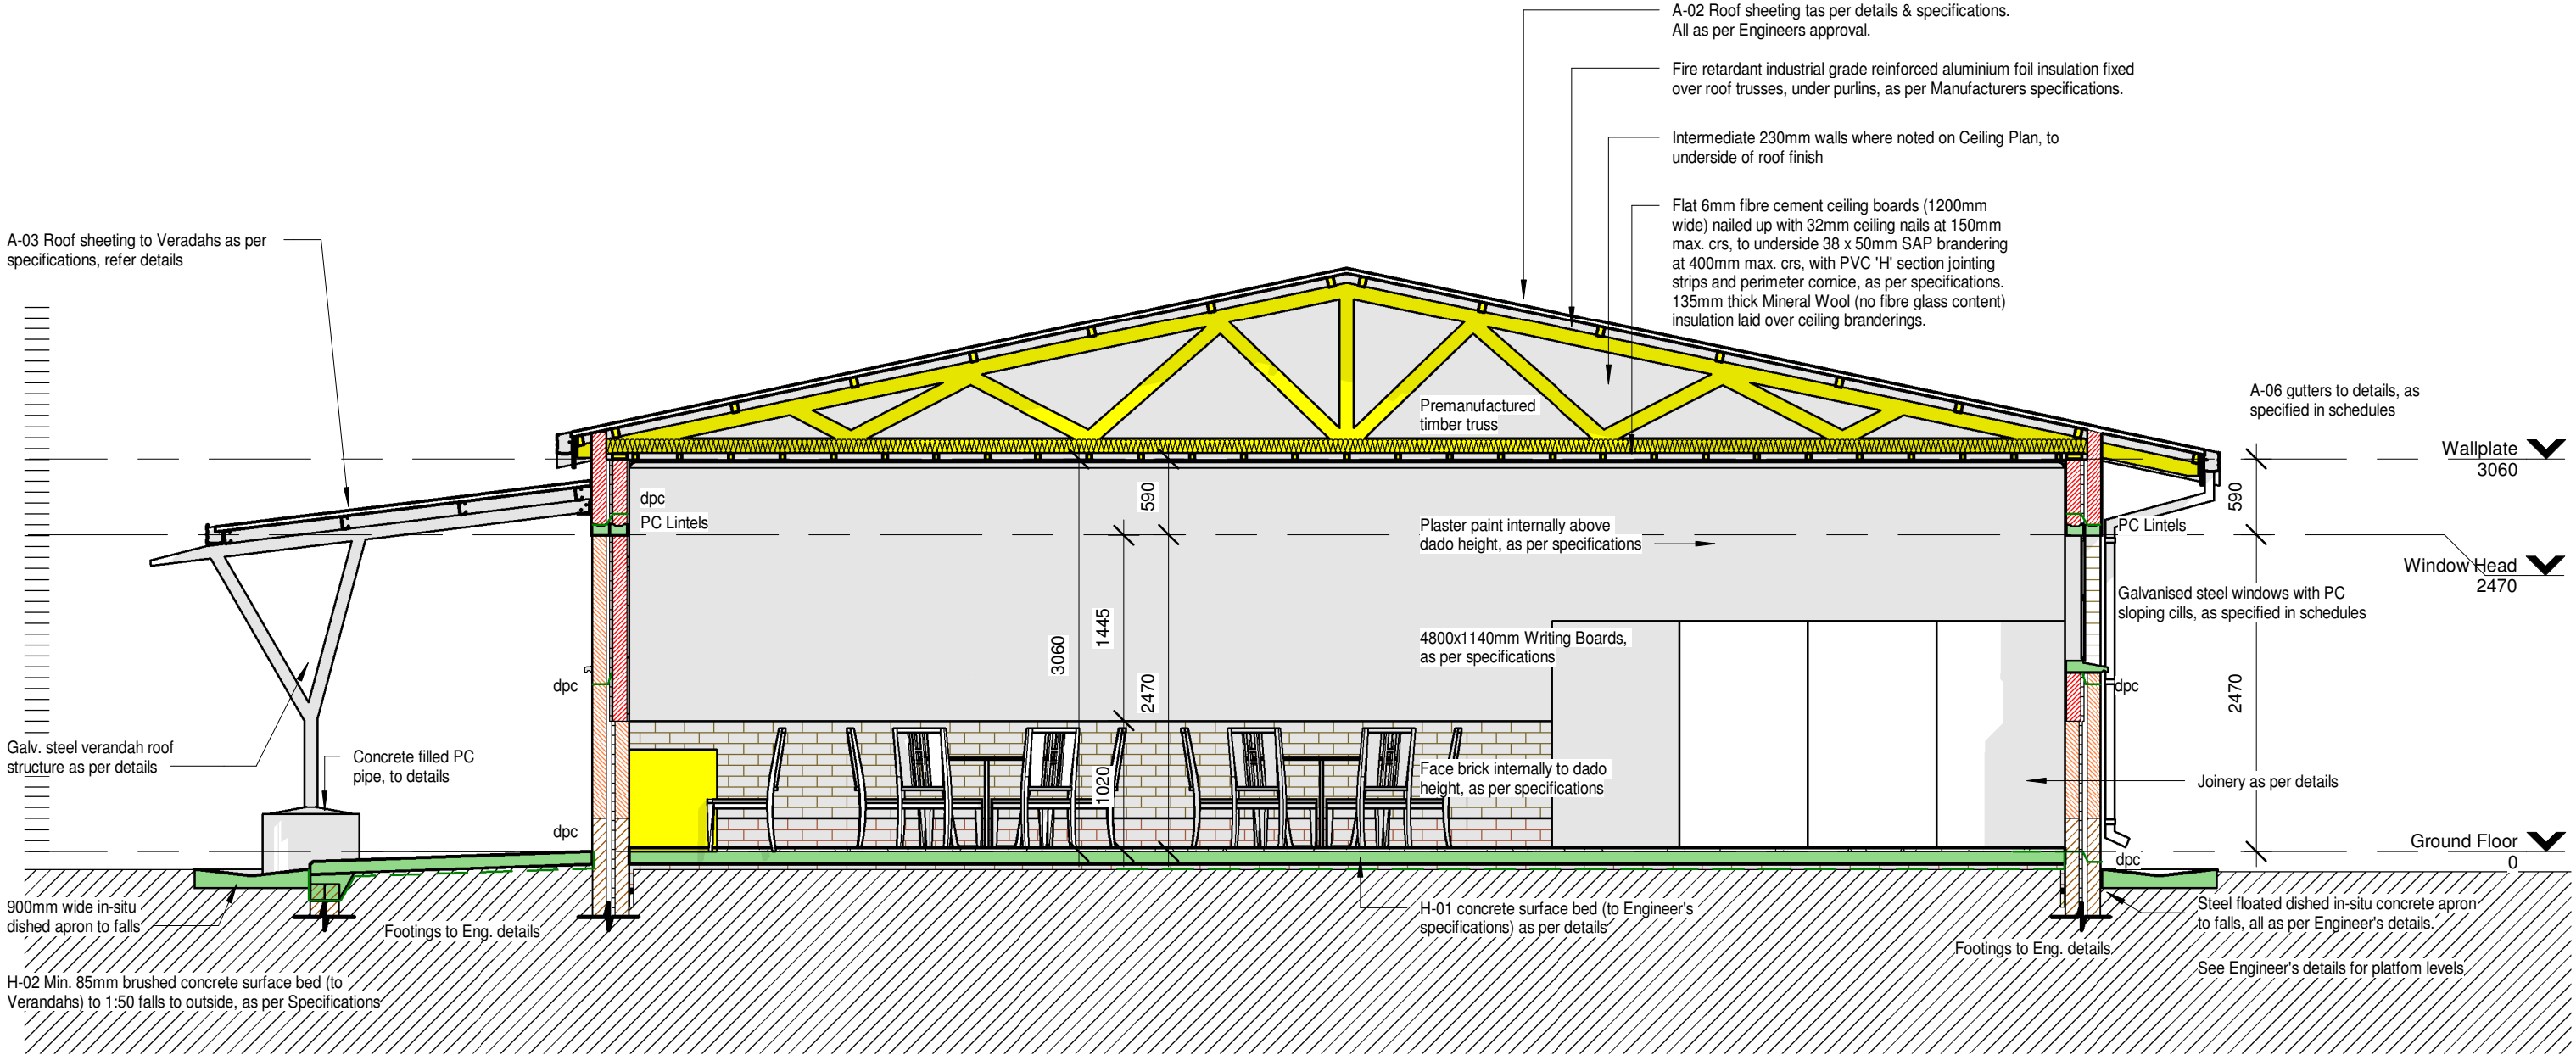

1 Section 1
1 : 50

COPYRIGHT NOTE

THIS DRAWING IS SUBJECT TO COPYRIGHT AND MAY NOT BE REPRODUCED, IN WHOLE OR PART, OR IN ANY MANNER WHATSOEVER WITHOUT WRITTEN PERMISSION FROM THE ARCHITECT.
ALL WORK TO BE CARRIED OUT STRICTLY IN ACCORDANCE WITH MUNICIPAL AND/OR LOCAL AUTHORITY REGULATIONS. DO NOT SCALE THIS DRAWING. FIGURED DIMENSIONS TO BE TAKEN IN.
PREFERENCE TO SCALING DRAWING.
ALL RELEVANT DETAILS, LEVELS, AND DIMENSIONS TO BE CHECKED ON SITE PRIOR TO COMMENCEMENT OF WORK.
ANY DISCREPANCIES TO BE BROUGHT TO THE ATTENTION OF THE ARCHITECT.
DIMENSIONS ARE INDICATED IN MILLIMETERS.



REV	DATE	DESCRIPTION


PRINCIPAL AGENT

PRINCIPAL AGENT
LOGO HERE


DISCIPLINE

ARCHITECT LOGO HERE

PROJECT DESCRIPTION	IMPLEMENTATION PROGRAMME	DRAWING DESCRIPTION	SECTIONS
DOCUMENT STATUS	DOCUMENT STATUS	DRAWING NUMBER	0000_AR_DD2_300
PROJECT NUMBER	0000	DRAWING NUMBER	0000_AR_DD2_300
DRAWING NUMBER	0000	CHECK	XX
DATE	DD-MM-YYYY	DATE	DD-MM-YYYY
SCALE	1 : 50	SCALE	1 : 50

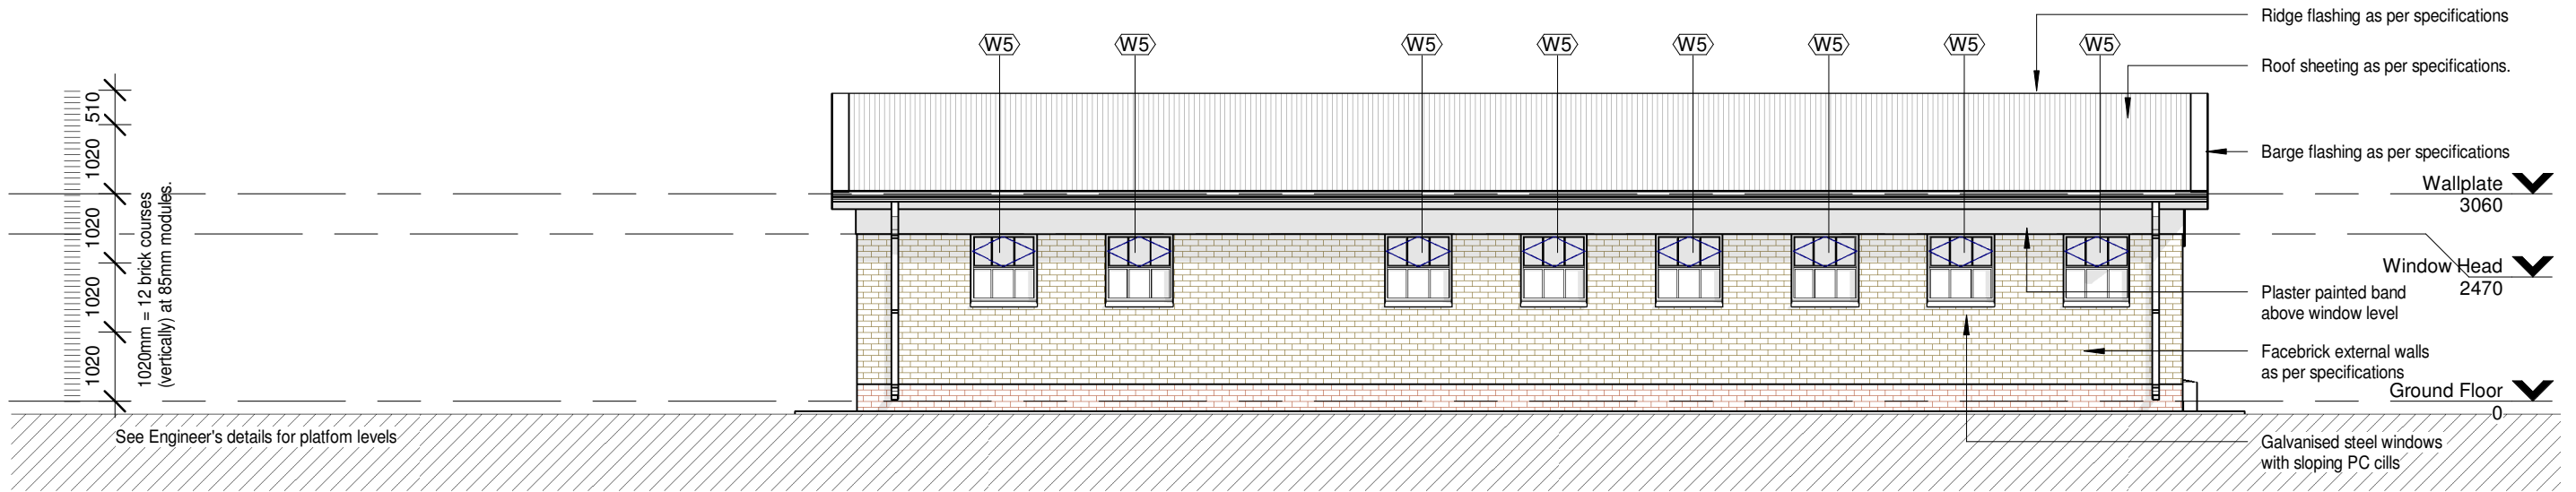

1 ELEVATION-1
1 : 100



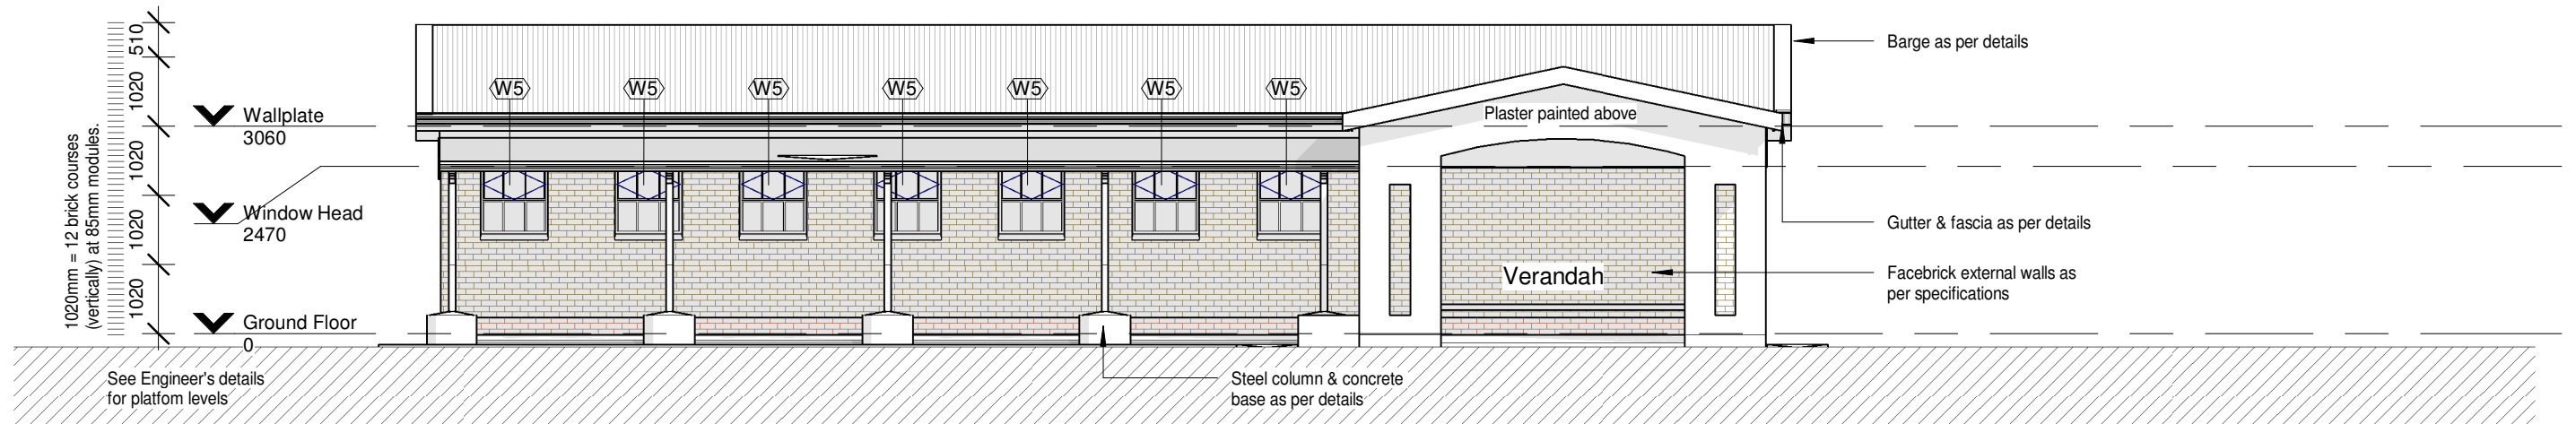


2 ELEVATION-3
1 : 100








WINDOW TYPE:	W5	QUANTITY:	DESCRIPTION:
<p>NOTE: All glazing shall be in accordance with SABS 0400 - 1990, SABS 0137 and SABS 1263 - 1 all safety glazing materials (individual panes) shall be permanently marked. Such marking shall be visible after glazing process. If it is not marked, it is not safety glass.</p>			<p>Durowin SS31/SSF31 internally glazed industrial hot dip galvanised, size 987 x 978mm high with B2 burglar bars (bars on opening sections only).</p>
			FINISH:
			<p>Galvanised Mild Steel Painting: Dulux Gloss Enamel alkyd paint (Colour: To be selected) to galvanised steel.</p> <p>Surface to be sound, dry and clean. Apply Dulux Galvkleen to all bare galvanised areas, flush with water to remove all surface contaminants, until surface is water break-free. Prime surface with one coat Dulux Primer for Galvanised Iron (Code: D193-1856) with an overcoating time of 36 hours, undercoat with one coat Dulux Universal Undercoat (Code: D196-0763) with an overcoating time of 18 hours and finish with two coats Dulux Gloss Enamel (Code: D232-0734) with an overcoating time of 18 hours.</p>
			GLAZING:
			<p>Glass: 6.38mm Clear Laminated Safety glass</p> <p>Strictly in accordance with glass Manufacturer's recommendations and SANS 10137:2011 all in accordance with SANS 10400 parts b, n, xa</p>
ELEVATION (EXTERIOR)			
BUILDING No:	SCALE 1:25		
WINDOW No:			

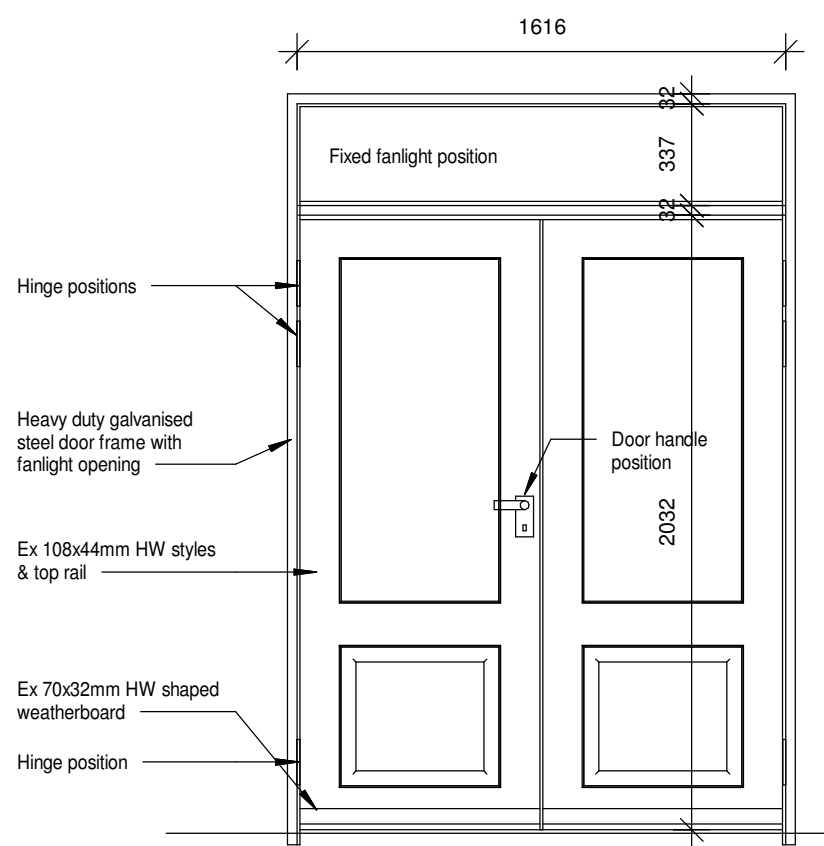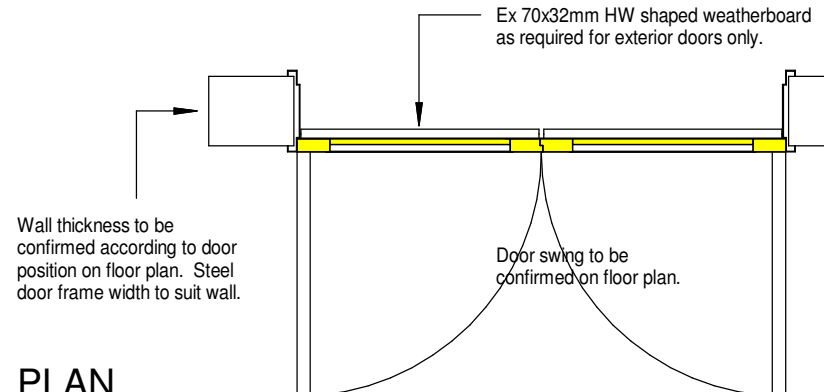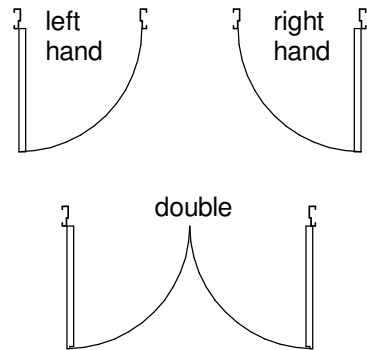[illegible]

DOOR TYPE:		D2	QUANTITY:		FRAME DESCRIPTION: 285mm standard 1.6mm galvanised steel door frame double rebated for 285mm brick wall. NOTE: Frame to be inclusive off 6x GMS hinges by Manufacturer & striker plate with sash & mortise.	
 <p>Hinge positions</p> <p>Heavy duty galvanised steel door frame with fanlight opening</p> <p>Ex 108x44mm HW styles & top rail</p> <p>Ex 70x32mm HW shaped weatherboard</p> <p>Hinge position</p> <p>Fixed fanlight position</p> <p>Door handle position</p> <p>2032</p> <p>1616</p> <p>337</p> <p>32</p>					FRAME FINISH: One coat primer One undercoat, and 2 coats low gloss non-drip enamel, as per Finishing Schedule	
<p>ELEVATION (EXTERIOR)</p>  <p>Ex 70x32mm HW shaped weatherboard as required for exterior doors only.</p> <p>Wall thickness to be confirmed according to door position on floor plan. Steel door frame width to suit wall.</p> <p>Door swing to be confirmed on floor plan.</p> <p>PLAN</p>					DOOR DESCRIPTION: 2x 813x2032mm x 44mm thick rebated doors. 6.36mm Clear Laminated Safety Glass top panels with moulded (both sides) hardwood bottom raised and fielded panels. Ex 70x32mm weather board Threshold reeded & to fall 6mm to outside.	
<p>BUILDING No:</p> <p>DOOR No:</p> <p>DOOR LOCATION:</p> <p>REFER TO BUILDING K.O.P. SCHEDULE</p>					DOOR FINISH: One coat wood primer One undercoat, and 2 coats low gloss non-drip enamel, as per Finishing Schedule, all in accordance with the Manufacturer's recommendations.	
<p>IRONMONGERY:</p> <p>Hinges: 3x (per leaf) factory fitted, as supplied by frame Manufacturer (Architect to approve sample before installation on site) Locks: Three lever mortice lockset as "Union 2277-78" with rebate conversion set 2900SC, with striking plate fixed to steel door frame. Door handles: "Union" "Protea" CB612-24SC brass lever furniture. Sundries: "Union" CZ8731SC door stop. 1x 150mm brass barrel bolt fitted to top & 1x 150mm brass necked barrie bolt fitted below, to fixed door leaf.</p>					NOTES: Hinges & frame to be supplied for approval prior to installation. 6.38mm clear laminated safety glass to fixed fanlight.	
					DOOR HANDING / LEGEND: 	
SCALE 1:25						

DOOR TYPE:	D4	QUANTITY:		FRAME DESCRIPTION:
				230 / 110mm (refer floor plan for wall size) standard 1.6mm galvanised steel door frame double rebated for 230 / 110mm brick wall. NOTE: Frame to be inclusive off 3x GMS hinges by Manufacturer & striker plate with sash & mortise.
				FRAME FINISH:
				One coat primer One undercoat, and 2 coats low gloss non-drip enamel, as per Finishing Schedule
				DOOR DESCRIPTION:
				813 x 2032mm x 44mm thick semi-solid core veneer panelled door with 8mm concealed edge.
				DOOR FINISH:
				One coat wood primer One undercoat, and 2 coats low gloss non-drip enamel, as per Finishing Schedule
				NOTES:
				Hinges & frame to be supplied for approval prior to installation. 6.38mm clear laminated safety glass to fixed fanlight.
				DOOR HANDING / LEGEND:
PLAN				
BUILDING No:				SCALE 1:25
DOOR No:				
DOOR LOCATION:				
Stores				
REFER TO BUILDING K.O.P. SCHEDULE				
IRONMONGERY:				
Hinges: 3x factory fitted, as supplied by frame Manufacturer (Architect to approve sample before installation on site) Locks: Three lever mortice lockset as "Union 2277-78" with striking plate fixed to steel door frame. Door handles: "Union" 'Protea' CB612-24SC brass lever furniture. Sundries: "Union" CZ8731SC door stop.				

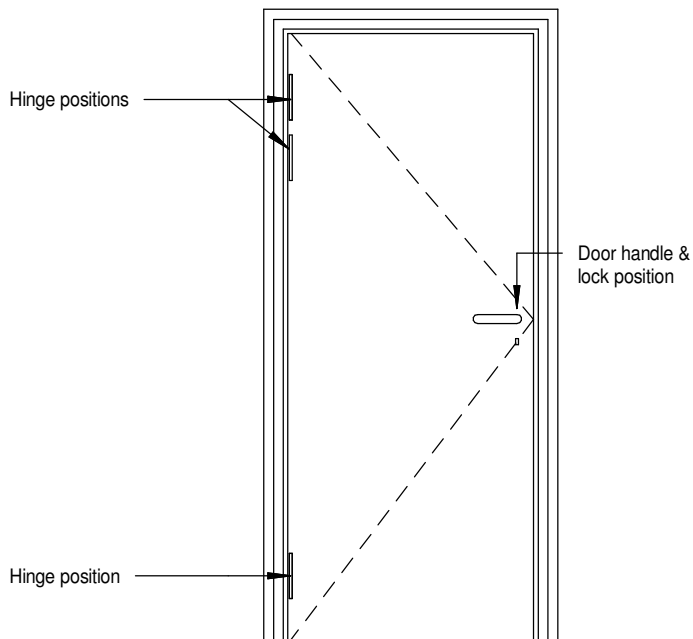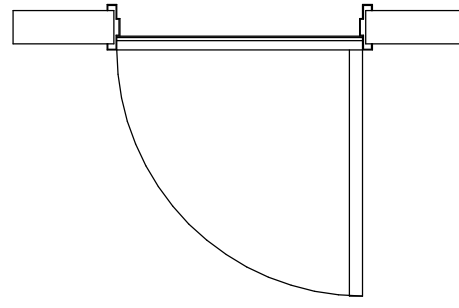[illegible]

DOOR TYPE:		D7	QUANTITY:		FRAME DESCRIPTION:
<div></div> <div>ELEVATION (EXTERIOR)</div> <div></div> <div>PLAN</div>					N/A
					FRAME FINISH:
					N/A
					DOOR DESCRIPTION:
					895 x 2072mm high door with overall mass of 130kg Record Room Door & frame, to be Austen or similar approved.
DOOR FINISH:					
As per Manufacturer					
NOTES:					
All to Manufacturer's specifications.					
DOOR HANDING / LEGEND:					
<div><div>left hand</div><div>right hand</div><div>double</div></div>					
BUILDING No:		SCALE 1:25			
DOOR No:					
DOOR LOCATION:					
REFER TO BUILDING K.O.P. SCHEDULE					
IRONMONGERY:					
By Manufacturer					

[illegible]

GATE TYPE:	G6	QUANTITY:
------------	----	-----------

50x5mm GMS brackets for bolting into wall, to approval

25x50mm (x 2mm wall) steel hollow section frame with 5x40mm flat bar steel intermediate vertical members and 12mmØ round bar stiffening member as indicated, all to be hot-dipped galvanised to approval

Underside lam. beam - check on site

2900 Overall opening to be checked on site

ELEVATION (EXTERIOR)

Hinge position.
Hot dipped galvanised steel 10mm dia. pin & eye hinges, welded to gate frame / Ex 50x10mm flat bar bracket to be 2x 12mm dia. rawl-bolted to wall, to approval.

Padlock position.
Ex 50x10mm flat bar hot dipped galvanised steel padlock plates, welded to gate frame / bracket to be 2x 12mm dia. rawl-bolted to wall, to approval.

PLAN

BUILDING No:

GATE No:

SCALE 1:25

GATE DESCRIPTION:	
25x50mm (x 2mm wall) steel hollow section frame with 5x40mm flat bar steel intermediate vertical members and 12mmØ round bar stiffening member as indicated, all to be hot-dipped galvanised to approval. Gate size: to fit in 3050mm x 2900mm overall opening - check on site.	
GATE FINISH:	IRONMONGERY:
One coat primer One undercoat, and 2 coats low gloss non-drip enamel, as per Finishing Schedule	All Hinge, Lock & Fixing Details to be presented to Architect for approval before manufacture of gates. Padlock to be supplied by Client.

[illegible]